
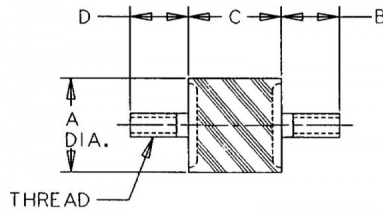


VMA-1530K in Sandwich Mounts (Metric Thread) Type 1

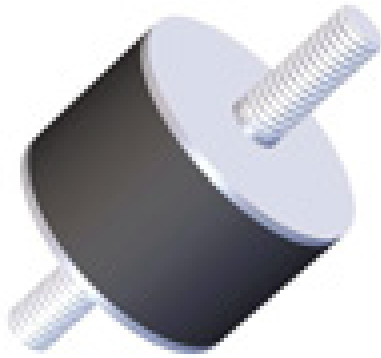

## Specifications

PRODUCT TYPE	Mounts
MANUFACTURER	RPM Mechanical Inc
TYPE	1
ELASTOMER	Natural Rubber
COMPRESSION STATIC LOAD	35 lbs 159 N
COMPRESSION - SPRING RATE KC	230 lbs/in 41 N/mm
SHEAR STATIC LOAD	53 lbs 72 N
SHEAR - SPRING RATE KS	

12 lbs/in  
11 N/mm

A	0.59 in
B	0.51 in
C	1.18 in
D	0.51 in
THREAD TYPE	Metric
THREAD SIZE	M4
GRADE PER SAE J429	4.6
DUROMETER	68

Rubber Flex Bobbin Sandwich Mounts are designed to protect equipment and machinery against damaging vibration. This family of mounts has excellent capacity for energy control. Constructed with high-strength bonds and specially compounded elastomers, these mounts provide high load-carrying capacity and assure long life.

The simple design and unitized construction provide low-cost mounting systems which are compact, lightweight, easy to install and maintenance-free.

These mounts are available in three size groups to suit a variety of applications. Small Rubber Flex Bobbin Sandwich Mounts are available in metric and standard (UNC) threads.

Typical applications for Rubber Flex Bobbin Sandwich Mounts include business machines, motorcycles, heating, ventilating and air conditioning equipment, light motors, appliances, shipping containers, feeders, compactors and vibratory rollers.