Spec Sheets


J-1211-2-11 Dynaflex® Shear Type Couplings



Item # J-1211-2-11 Dynaflex® Shear Type Couplings
Manufacturer: Parker Lord Corporation

Specifications

Bolt Thread Size	**0.25**
Bore Diameter (A) (in)	**0.312**
C (in)	**0.75**
D Ref (in)	**1**
E Ref (in)	**0.72**
F (in)	**1.75**
Horse Power (1750 RPM) (hp)	**1/8**
Set Screw Size	**10/24**
Static Torsional Stiffness (lb/in)	**0.33**
Torque Rating (lb-in)	**5**
Torque Rating (lb/in)	**5**
Typical Applications	**Shear-type flexible couplings are useful in many small equipment driveline applications.Multi-directional misalignment capabilities make them ideally suited for fractional horsepower drivelines de**

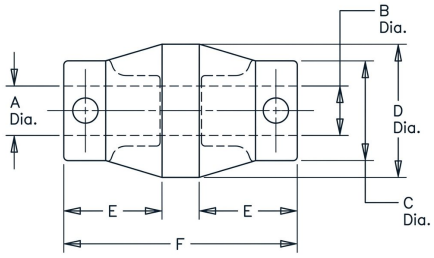

For Low Frequency Vibration Isolation and Misalignment Accommodation Compact, one-piece flexible couplings economically constructed to isolate low- frequency vibration and accommodate multi-directional misalignment. **Large Selection of Standard Sizes** Fractional horsepower couplings are available in a range of sizes to permit matching a specific coupling to your application. **Standard Construction :-** Hubs - steel, Bores - as listed, Set Screws - one per hub furnished but not installed, Flexing Element - neoprene. Compact, one-piece coupling construction is convenient for small equipment with fractional horsepower requirements. Torsional deflection at rated torque assures excellent vibration isolation. Specified torque rating allows 15° angular deflection for excellent vibration isolation. Max. recommended Misallgnments-1/32 in. parallel, 2° angular. Non-Stock Item, please contact

RPM INDUSTRIAL RUBBER PARTS

Request for Quote | Contact Us

USA
4392 Broadway
Depew, NY 14043

Canada
2290 Industrial Street
Burlington, Ontario
L7P 1A1

888.842.5668
905.335.5523
info@rpmrubberparts.com