Spec Sheets

J-1211-3-14 Dynaflex® Shear Type Couplings

Item # J-1211-3-14 Dynaflex® Shear Type Couplings
Manufacturer: Parker Lord Corporation

Specifications

Bolt Thread Size	**0.312**
Bore Diameter (A) (in)	**3/8**
C (in)	**0.88**
D Ref (in)	**1.25**
E Ref (in)	**0.88**
F (in)	**2.13**
Horse Power (1750 RPM) (hp)	**1/4**
Set Screw Size	**1/4 to 20**
Static Torsional Stiffness (lb/in)	**0.66**
Torque Rating (lb-in)	**10**
Torque Rating (lb/in)	**10**
Typical Applications	**Shear-type flexible couplings are useful in many small equipment driveline applications.Multi-directional misalignment capabilities make them ideally suited for fractional horsepower drivelines de**

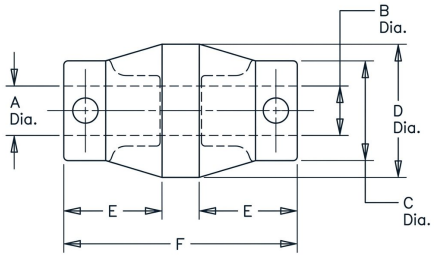

For Low Frequency Vibration Isolation and Misalignment Accommodation Compact, one-piece flexible couplings economically constructed to isolate low- frequency vibration and accommodate multi-directional misalignment.
Large Selection of Standard Sizes
Fractional horsepower

RPM INDUSTRIAL RUBBER PARTS

Request for Quote

Contact Us

USA
4392 Broadway
Depew, NY 14043

Canada
2290 Industrial Street
Burlington, Ontario
L7P 1A1

888.842.5668
905.335.5523
info@rpmrubberparts.com

Compact, one-piece coupling construction is convenient for small equipment with fractional horsepower requirements. Torsional deflection at rated torque assures excellent vibration isolation. Specified torque rating allows 15° angular deflection for excellent vibration isolation.
Max. recommended Misallgnments-1/32 in. parallet, 2° angular.
Non-Stock Item, please contact

USA
4392 Broadway
Depew, NY 14043

Canada
2290 Industrial Street
Burlington, Ontario
L7P 1A1

888.842.5668
905.335.5523
info@rpmrubberparts.com