Spec Sheets

J-1211-3-2 Dynaflex® Shear Type Couplings

Item # J-1211-3-2 Dynaflex® Shear Type Couplings
Manufacturer: Parker Lord Corporation

Specifications

Bolt Thread Size	**0.375**
Bore Diameter (A) (in)	**3/8**
C (in)	**0.88**
D Ref (in)	**1.25**
E Ref (in)	**0.88**
F (in)	**2.13**
Horse Power (1750 RPM) (hp)	**1/4**
Set Screw Size	**1/4 to 20**
Static Torsional Stiffness (lb/in)	**0.66**
Torque Rating (lb-in)	**10**
Torque Rating (lb/in)	**10**
Typical Applications	**Shear-type flexible couplings are useful in many small equipment driveline applications.Multi-directional misalignment capabilities make them ideally suited for fractional horsepower drivelines de**

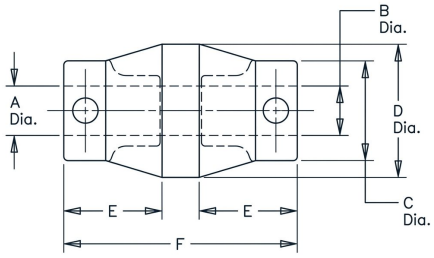

For Low Frequency Vibration Isolation and Misalignment Accommodation Compact, one-piece flexible couplings economically constructed to isolate low- frequency vibration and accommodate multi-directional misalignment.
Large Selection of Standard Sizes Fractional horsepower couplings are available in a

RPM INDUSTRIAL RUBBER PARTS

Request for Quote

Contact Us

USA
4392 Broadway
Depew, NY 14043

Canada
2290 Industrial Street
Burlington, Ontario
L7P 1A1

888.842.5668
905.335.5523
info@rpmrubberparts.com

convenient for small equipment with fractional horsepower requirements. Torsional deflection at rated torque assures excellent vibration isolation. Specified torque rating allows 15° angular deflection for excellent vibration isolation. Max. recommended Misallgnments- 1/32 in. parallet, 2° angular. Non-Stock Item, please contact

USA
4392 Broadway
Depew, NY 14043

Canada
2290 Industrial Street
Burlington, Ontario
L7P 1A1

888.842.5668
905.335.5523
info@rpmrubberparts.com