Spec Sheets

# J-1211-7-21 Dynaflex® Shear Type Couplings

**Item #** J-1211-7-21 Dynaflex® Shear Type Couplings
**Manufacturer:** Parker Lord Corporation

## Specifications

| | |
|---|---|
| **Bolt Thread Size** | **0.75** |
| **Bore Diameter (A) (in)** | **0.875** |
| **C (in)** | **1.5** |
| **D Ref (in)** | **2** |
| **E Ref (in)** | **1.11** |
| **F (in)** | **2.88** |
| **Horse Power (1750 RPM) (hp)** | **1** |
| **Set Screw Size** | **5/16 to 18** |
| **Static Torsional Stiffness (lb/in)** | **2.66** |
| **Torque Rating (lb-in)** | **40** |
| **Torque Rating (lb/in)** | **40** |
| **Typical Applications** | **Shear-type flexible couplings are useful in many small equipment driveline applications.Multi-directional misalignment capabilities make them ideally suited for fractional horsepower drivelines de** |

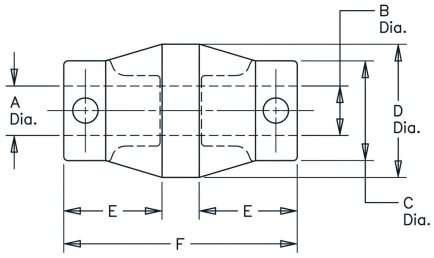


**For Low Frequency Vibration Isolation and Misalignment Accommodation** Compact, one-piece flexible couplings economically constructed to isolate low- frequency vibration and accommodate multi-directional misalignment.
**Large Selection of Standard Sizes** Fractional horsepower couplings are available in a

RPM INDUSTRIAL RUBBER PARTS

Request for Quote

Contact Us

**USA**
4392 Broadway
Depew, NY 14043

**Canada**
2290 Industrial Street
Burlington, Ontario
L7P 1A1

888.842.5668
905.335.5523
info@rpmrubberparts.com

convenient for small equipment with fractional horsepower requirements. Torsional deflection at rated torque assures excellent vibration isolation. Specified torque rating allows 15° angular deflection for excellent vibration isolation. Max. recommended Misallgnments- 1/32 in. parallet, 2° angular. Non-Stock Item, please contact



**USA**
4392 Broadway
Depew, NY 14043

**Canada**
2290 Industrial Street
Burlington, Ontario
L7P 1A1

888.842.5668
905.335.5523
info@rpmrubberparts.com