Spec Sheets

J-16462-4 Leveling Mounts

Item # J-16462-4 Leveling Mounts
Manufacturer: Parker Lord Corporation

Specifications

Adjusting Bolt	**127**
Bolt Diameter	**3/4**
Bolt Thread Size	**10UNC x 5"**
D (in)	**6 1/4**
Frequency	**12**
H (in)	**1 5/8**
H (mm)	**41.3**
Height (in)	**1 5/8**
Installation	**Before installing be sure the mounts are the right ones for your machine. Remove adjusting bolt and lock nut from mount. Raise machine and sli**
Manufacturer	**Parker LORD**
Material	**Stainless Steel**
Max Axial Load Rating (lbs)	**4500**
Max Axial Load Rating (Metric)	**20017**

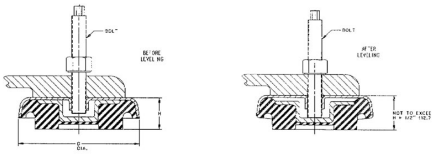

Lord Machinery Mounts are designed to support heavy equipment and isolate intermittent or continuous vibration. The result is greater machine accuracy, longer service life, smoother operation and reduced maintenance. These mounts are available in four types to suit different needs. Leveling Mounts provide the ability to level equipment and machinery. These mounts offer a vertical natural frequency under maximum load of 12 Hz. They are constructed of a neoprene elastomer, which resists oil, ozone and caustic materials, and a high-visibility yellow housing made of high strength steel. Maximum adjustment is 1/2" (12.7mm). Do not exceed this amount. Metal housing made of high strength steel - high visibility yellow paint (OSHA approved).

RPM INDUSTRIAL RUBBER PARTS

Request for Quote | Contact Us

USA
4392 Broadway
Depew, NY 14043

Canada
2290 Industrial Street
Burlington, Ontario
L7P 1A1

888.842.5668
905.335.5523
info@rpmrubberparts.com

Spec Sheets

J-16462-4 Leveling Mounts

Item # J-16462-4 Leveling Mounts
Manufacturer: Parker Lord Corporation

Specifications (Continued)

Weight (lbs/ft)	**2.3**
Weight (Metric)	**5**

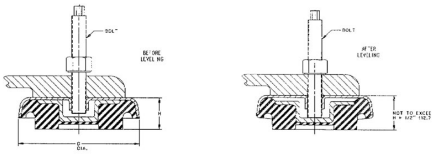

Lord Machinery Mounts are designed to support heavy equipment and isolate intermittent or continuous vibration. The result is greater machine accuracy, longer service life, smoother operation and reduced maintenance. These mounts are available in four types to suit different needs. Leveling Mounts provide the ability to level equipment and machinery. These mounts offer a vertical natural frequency under maximum load of 12 Hz. They are constructed of a neoprene elastomer, which resists oil, ozone and caustic materials, and a high-visibility yellow housing made of high strength steel. Maximum adjustment is 1/2" (12.7mm). Do not exceed this amount. Metal housing made of high strength steel - high visibility yellow paint (OSHA approved).

RPM INDUSTRIAL RUBBER PARTS

Request for Quote

Contact Us

USA
4392 Broadway
Depew, NY 14043

Canada
2290 Industrial Street
Burlington, Ontario
L7P 1A1

888.842.5668
905.335.5523
info@rpmrubberparts.com