


J-16462-4 Leveling Mounts


Item # J-16462-4 Leveling Mounts

Manufacturer: Parker Lord Corporation



Specifications

Adjusting Bolt	127
Bolt Diameter	3/4
Bolt Thread Size	10UNC x 5"
D (in)	6 1/4
Frequency	12
H (in)	1 5/8
H (mm)	41.3
Height (in)	1 5/8
Installation	Before installing be sure the mounts are the right ones for your machine. Remove adjusting bolt and lock nut from mount. Raise machine and sli
Manufacturer	Parker LORD
Material	Stainless Steel
Max Axial Load Rating (lbs)	4500
Max Axial Load Rating (Metric)	20017

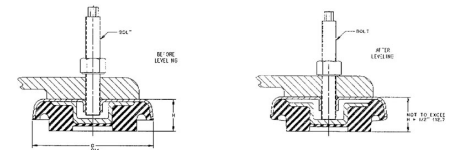

Lord Machinery Mounts are designed to support heavy equipment and isolate intermittent or continuous vibration.

The result is greater machine accuracy, longer service life, smoother operation and reduced maintenance. These mounts are available in four types to suit different needs.

Leveling Mounts provide the ability to level equipment and machinery.

These mounts offer a vertical natural frequency under maximum load of 12 Hz. They are constructed of a neoprene



[Request for Quote](#)

[Contact Us](#)

USA
4392 Broadway
Depew, NY 14043

Canada
2290 Industrial Street
Burlington, Ontario
L7P 1A1

888.842.5668

905.335.5523

info@rpmrubberparts.com




yellow paint (OSHA approved).



[Request for Quote](#)

[Contact Us](#)

 **USA**
4392 Broadway
Depew, NY 14043

 **Canada**
2290 Industrial Street
Burlington, Ontario
L7P 1A1

 888.842.5668

 905.335.5523


 info@rpmrubberparts.com



J-16462-4 Leveling Mounts


Item # J-16462-4 Leveling Mounts

Manufacturer: Parker Lord Corporation

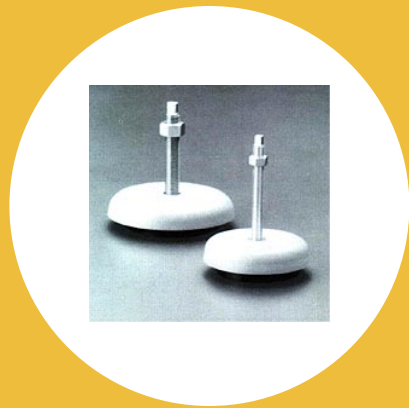

Specifications (Continued)

Weight (lbs/ft)	2.3
Weight (Metric)	5

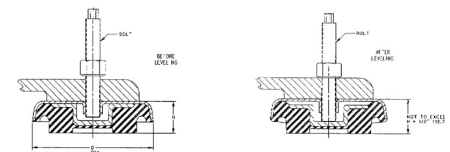

Lord Machinery Mounts are designed to support heavy equipment and isolate intermittent or continuous vibration. The result is greater machine accuracy, longer service life, smoother operation and reduced maintenance. These mounts are available in four types to suit different needs.

Leveling Mounts provide the ability to level equipment and machinery. These mounts offer a vertical natural frequency under maximum load of 12 Hz. They are constructed of a neoprene



[Request for Quote](#)

[Contact Us](#)

USA
4392 Broadway
Depew, NY 14043

Canada
2290 Industrial Street
Burlington, Ontario
L7P 1A1

888.842.5668

905.335.5523

info@rpmrubberparts.com



yellow paint (OSHA approved).



[Request for Quote](#)

[Contact Us](#)



USA

4392 Broadway
Depew, NY 14043



Canada

2290 Industrial Street
Burlington, Ontario
L7P 1A1



888.842.5668



905.335.5523



info@rpmrubberparts.com

