

# J-2172-1 Chan-L™ Mount


Item # J-2172-1 Chan-L™ Mount

Manufacturer: Parker Lord Corporation



## Specifications

A (in)	4
B (in)	2.5
C (in)	3.69
D (in)	4.5
E (in)	2.75
F (in)	1.56
F (mm)	39.6
Frequency	600
G (in)	0.59
G (mm)	15
Manufacturer	Parker LORD
Max Axial Deflection (in)	0.25
Max Axial Deflection (Metric)	6.4

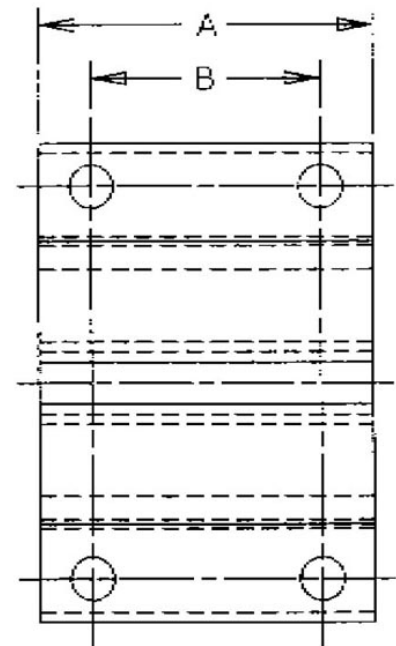

Lord Machinery Mounts are designed to support heavy equipment and isolate intermittent or continuous vibration. The result is greater machine accuracy and longer



[Request for Quote](#)

[Contact Us](#)

**USA**  
4392 Broadway  
Depew, NY 14043

**Canada**  
2290 Industrial Street  
Burlington, Ontario  
L7P 1A1

☎ 888.842.5668  
☎ 905.335.5523  
✉ info@rpmrubberparts.com



elastomer-supported channel design features a soft vertical spring rate. The design incorporates built-in protection against metal-to-metal bottoming. Typical applications include separating and grading screens and shakeouts. Provides opening for 3/8" (9.5mm) hex or square head bolt.



[Request for Quote](#)


[Contact Us](#)

 **USA**  
4392 Broadway  
Depew, NY 14043

 **Canada**  
2290 Industrial Street  
Burlington, Ontario  
L7P 1A1

 888.842.5668

 905.335.5523

 [info@rpmrubberparts.com](mailto:info@rpmrubberparts.com)



# J-2172-1 Chan-L™ Mount


Item # J-2172-1 Chan-L™ Mount

Manufacturer: Parker Lord Corporation



## Specifications (Continued)

Max Axial Load Rating (lbs)	200
Max Axial Load Rating (Metric)	889
Types	I
Weight (lbs/ft)	1.06
Weight (Metric)	0.5

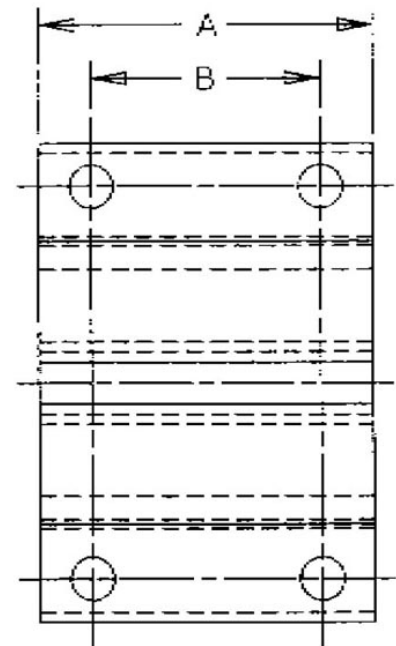

Lord Machinery Mounts are designed to support heavy equipment and isolate intermittent or continuous vibration. The result is greater machine accuracy and longer



[Request for Quote](#)

[Contact Us](#)

**USA**  
4392 Broadway  
Depew, NY 14043

**Canada**  
2290 Industrial Street  
Burlington, Ontario  
L7P 1A1

☎ 888.842.5668

☎ 905.335.5523

✉ [info@rpmrubberparts.com](mailto:info@rpmrubberparts.com)



elastomer-supported channel design features a soft vertical spring rate. The design incorporates built-in protection against metal-to-metal bottoming. Typical applications include separating and grading screens and shakeouts. Provides opening for 3/8" (9.5mm) hex or square head bolt.



[Request for Quote](#)


[Contact Us](#)

 **USA**  
4392 Broadway  
Depew, NY 14043

 **Canada**  
2290 Industrial Street  
Burlington, Ontario  
L7P 1A1

 888.842.5668

 905.335.5523

 [info@rpmrubberparts.com](mailto:info@rpmrubberparts.com)

