


J-3112-12-1 Grommet Isolators Standard

Item # J-3112-12-1 Grommet Isolators Standard



Specifications

| | |
|-------------------------------------|----------------|
| Axial Static Spring Rate (lbs/in) | 22 |
| Axial Static Spring Rate (Metric) | 3.9 |
| Depth (in) | 0.555 |
| Elastomer | Natural Rubber |
| Ferrule Part Number | Y-10879-B |
| Figure | 3 |
| Max Axial Load Rating (lbs) | 1 |
| Max Axial Load Rating (Metric) | 4 |
| Radial Static Spring Rate (lbs/in) | 44 |
| Radial Static Spring Rate (Metric) | 7.7 |
| Support Member Plate Diameter (in) | 0.555 |
| Support Member Plate Diameter (mm) | 14.1 |
| Support Member Plate Thickness (in) | 0.062 |

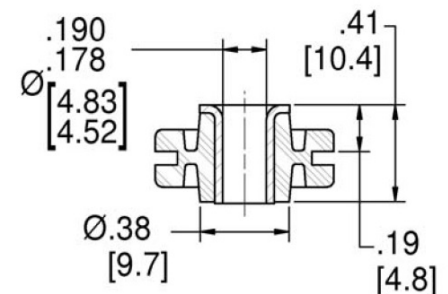

Lord Grommet Isolators provide effective, economical vibration isolation for light loads. They are suitable for commercial and military applications including computers, disk drives, business machines, precision instrumentation and general industrial equipment.

Lord Grommet Isolators are designed and produced with the same kind of precision and care as our high performance bonded elastomeric mounts.


[Request for Quote](#)
[Contact Us](#)

USA
4392 Broadway
Depew, NY 14043

Canada
2290 Industrial Street
Burlington, Ontario
L7P 1A1

888.842.5668

905.335.5523

info@rpmrubberparts.com



30 Hz. Damped Grommet
Isolators are made of SPE®/D
Elastomer. They are well
suited to applications which
involve limited sway space.



[Request for Quote](#)


[Contact Us](#)

 **USA**
4392 Broadway
Depew, NY 14043

 **Canada**
2290 Industrial Street
Burlington, Ontario
L7P 1A1

 888.842.5668

 905.335.5523

 info@rpmrubberparts.com




J-3112-12-1 Grommet Isolators Standard



Item # J-3112-12-1 Grommet Isolators Standard

Specifications (Continued)

| | |
|-------------------------------------|----------|
| Support Member Plate Thickness (mm) | 1.6 |
| Thickness (in) | 0.062 |
| Thickness (Metric) | 1.6 |
| Thread Size | #8 Screw |

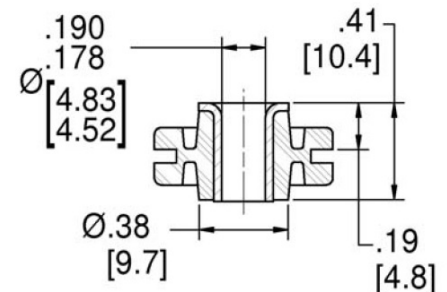

Lord Grommet Isolators provide effective, economical vibration isolation for light loads. They are suitable for commercial and military applications including computers, disk drives, business machines, precision instrumentation and general industrial equipment. Lord Grommet Isolators are designed and produced with the same kind of precision and care as our high performance bonded elastomeric mounts.



[Request for Quote](#)

[Contact Us](#)

USA
4392 Broadway
Depew, NY 14043

Canada
2290 Industrial Street
Burlington, Ontario
L7P 1A1

☎ 888.842.5668

☎ 905.335.5523

✉ info@rpmrubberparts.com



30 Hz. Damped Grommet
Isolators are made of SPE®/D
Elastomer. They are well
suited to applications which
involve limited sway space.



[Request for Quote](#)

[Contact Us](#)



USA

4392 Broadway
Depew, NY 14043



Canada

2290 Industrial Street
Burlington, Ontario
L7P 1A1



888.842.5668



905.335.5523



info@rpmrubberparts.com

