


# J-3112-8-3 Grommet Isolators Standard



Item # J-3112-8-3 Grommet Isolators Standard

## Specifications

Axial Static Spring Rate (lbs/in)	50
Axial Static Spring Rate (Metric)	8.8
Depth (in)	0.555
Elastomer	Neoprene Oil Resistant
Ferrule Part Number	Y-10879-B
Figure	3
Max Axial Load Rating (lbs)	3
Max Axial Load Rating (Metric)	13
Radial Static Spring Rate (lbs/in)	100
Radial Static Spring Rate (Metric)	17.5
Support Member Plate Diameter (in)	0.555
Support Member Plate Diameter (mm)	14.1
Support Member Plate Thickness (in)	0.062

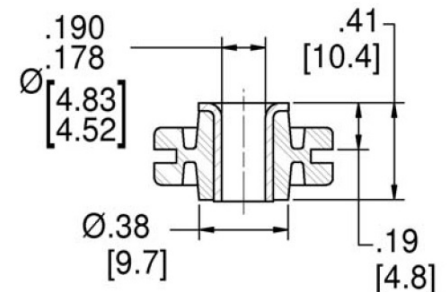

Lord Grommet Isolators provide effective, economical vibration isolation for light loads. They are suitable for commercial and military applications including computers, disk drives, business machines, precision instrumentation and general industrial equipment. Lord Grommet Isolators are designed and produced with the same kind of precision and care as our high performance bonded elastomeric mounts.


[Request for Quote](#)
[Contact Us](#)

**USA**  
4392 Broadway  
Depew, NY 14043

**Canada**  
2290 Industrial Street  
Burlington, Ontario  
L7P 1A1

888.842.5668

905.335.5523

info@rpmrubberparts.com



30 Hz. Damped Grommet  
Isolators are made of SPE®/D  
Elastomer. They are well  
suited to applications which  
involve limited sway space.



[Request for Quote](#)


[Contact Us](#)

 **USA**  
4392 Broadway  
Depew, NY 14043

 **Canada**  
2290 Industrial Street  
Burlington, Ontario  
L7P 1A1

 888.842.5668

 905.335.5523

 [info@rpmrubberparts.com](mailto:info@rpmrubberparts.com)




# J-3112-8-3 Grommet Isolators Standard



Item # J-3112-8-3 Grommet Isolators Standard

## Specifications (Continued)

Support Member Plate Thickness (mm)	1.6
Thickness (in)	0.062
Thickness (Metric)	1.6
Thread Size	#8 Screw

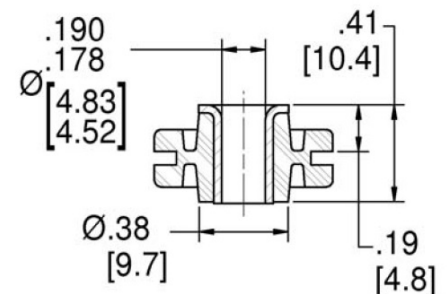

Lord Grommet Isolators provide effective, economical vibration isolation for light loads. They are suitable for commercial and military applications including computers, disk drives, business machines, precision instrumentation and general industrial equipment. Lord Grommet Isolators are designed and produced with the same kind of precision and care as our high performance bonded elastomeric mounts.



[Request for Quote](#)

[Contact Us](#)

**USA**  
4392 Broadway  
Depew, NY 14043

**Canada**  
2290 Industrial Street  
Burlington, Ontario  
L7P 1A1

☎ 888.842.5668

☎ 905.335.5523

✉ [info@rpmrubberparts.com](mailto:info@rpmrubberparts.com)



30 Hz. Damped Grommet  
Isolators are made of SPE®/D  
Elastomer. They are well  
suited to applications which  
involve limited sway space.



[Request for Quote](#)

[Contact Us](#)



**USA**

4392 Broadway  
Depew, NY 14043



**Canada**

2290 Industrial Street  
Burlington, Ontario  
L7P 1A1



888.842.5668



905.335.5523



[info@rpmrubberparts.com](mailto:info@rpmrubberparts.com)

