Spec Sheets


J-8006-66 Two-Piece Mounts Cbb Cbc Series



Item # J-8006-66 Two-Piece Mounts Cbb Cbc Series
Manufacturer: Lord Corporation

Specifications

A (in)	**2.5**
Applicable Steel Washer	**J-2049-68**
B (in)	**0.64**
C (in)	**1.5**
D (in)	**1.19**
E (in)	**0.94**
F (in)	**0.62**
F (mm)	**15.7**
Figure	**3 & 4**
G (in)	**0.5**
G (mm)	**12.7**
ID (in)	**0.66**
ID (mm)	**16.8**

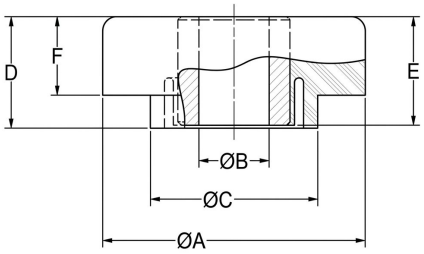

Two-Piece Mounts are designed for applications involving severe dynamic forces in the static load direction, as well as the rebound direction.
Travel is limited in both directions by rubber in compression which provides snubbing.
These mounts are designed to support engines, cabs and accessory units, accommodate frame racking and twisting while isolating vibration and absorbing shock.
Typical applications for Two-Piece Mounts include on-highway, off-highway vehicles, construction and industrial machines.
These loads are for on-highway and general industrial uses. For off-highway, use 90% of the load shown.

RPM INDUSTRIAL RUBBER PARTS

Request for Quote

Contact Us

USA
4392 Broadway
Depew, NY 14043

Canada
2290 Industrial Street
Burlington, Ontario
L7P 1A1

888.842.5668
905.335.5523
info@rpmrubberparts.com

Spec Sheets


J-8006-66 Two-Piece Mounts Cbb Cbc Series



Item # J-8006-66 Two-Piece Mounts Cbb Cbc Series
Manufacturer: Lord Corporation

Specifications (Continued)

Manufacturer	**Parker LORD**
Material	**Low Carbon Steel**
Max Axial Static Load at Deflection (lbs)	**565 at 0.04**
Max Axial Static Load Rating at Deflection (lbs/in)	**565 at 0.04**
Max Axial Static Load Rating at Deflection (N/mm)	**2515 at 0.95**
Recommended Bolt Grade or Class (SAE J1199)	**10.9**
Recommended Bolt Grade or Class (SAE J429)	**8**
Recommended Bolt Size (in)	**5/8**
SD (in)	**1.53**
SD (mm)	**38.9**
T (in)	**0.88**
T (mm)	**22.4**
WD (in)	**2.88**

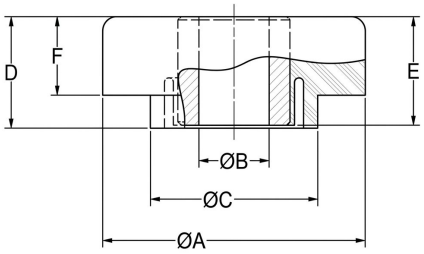

Two-Piece Mounts are designed for applications involving severe dynamic forces in the static load direction, as well as the rebound direction.
Travel is limited in both directions by rubber in compression which provides snubbing.
These mounts are designed to support engines, cabs and accessory units, accommodate frame racking and twisting while isolating vibration and absorbing shock.
Typical applications for Two-Piece Mounts include on-highway, off-highway vehicles, construction and industrial machines.
These loads are for on-highway and general industrial uses. For off-highway, use 90% of the load shown.

RPM INDUSTRIAL RUBBER PARTS

Request for Quote

Contact Us

USA
4392 Broadway
Depew, NY 14043

Canada
2290 Industrial Street
Burlington, Ontario
L7P 1A1

888.842.5668
905.335.5523
info@rpmrubberparts.com

Spec Sheets


J-8006-66 Two-Piece Mounts Cbb Cbc Series



Item # J-8006-66 Two-Piece Mounts Cbb Cbc Series
Manufacturer: Lord Corporation

Specifications (Continued)

WD (mm)	**73.2**
WT (in)	**0.125**
WT (mm)	**3.2**

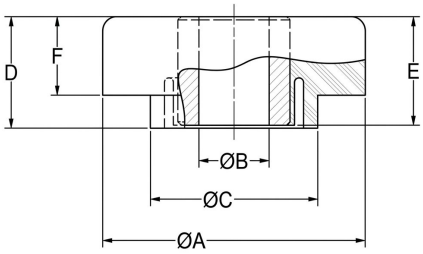

Two-Piece Mounts are designed for applications involving severe dynamic forces in the static load direction, as well as the rebound direction.
Travel is limited in both directions by rubber in compression which provides snubbing.
These mounts are designed to support engines, cabs and accessory units, accommodate frame racking and twisting while isolating vibration and absorbing shock.
Typical applications for Two-Piece Mounts include on-highway, off-highway vehicles, construction and industrial machines.
These loads are for on-highway and general industrial uses. For off-highway, use 90% of the load shown.

RPM INDUSTRIAL RUBBER PARTS

Request for Quote

Contact Us

USA
4392 Broadway
Depew, NY 14043

Canada
2290 Industrial Street
Burlington, Ontario
L7P 1A1

888.842.5668
905.335.5523
info@rpmrubberparts.com