

SK-1947-14 Dynaflex® Shear Type Couplings




Item # SK-1947-14 Dynaflex® Shear Type Couplings

Manufacturer: Parker Lord Corporation

Specifications

Bolt Thread Size	0.125
Bore Diameter (A) (in)	0.187
Bore Diameter (B) (in)	0.187
C (in)	0.44
D Ref (in)	0.56
E Ref (in)	0.36
F (in)	0.81
Horse Power (1750 RPM) (hp)	1/50
Set Screw Size	5/40
Static Torsional Stiffness (lb/in)	0.053
Torque Rating (lb-in)	0.8
Torque Rating (lb/in)	0.8
Typical Applications	Shear-type flexible couplings are useful in many small equipment driveline applications. Multi-directional misalignment capabilities make them ideally suited for fractional horsepower

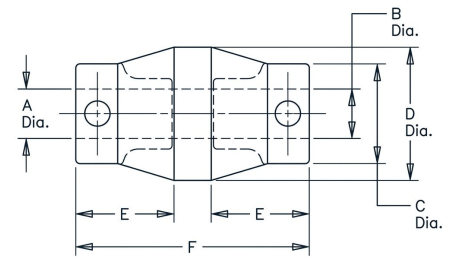

For Low Frequency Vibration Isolation and Misalignment Accommodation Compact, one-piece flexible couplings economically constructed to isolate low- frequency vibration and accommodate multi-directional misalignment.

Large Selection of Standard Sizes Fractional horsepower couplings are available in a


[Request for Quote](#)
[Contact Us](#)


USA

4392 Broadway
Depew, NY 14043



Canada

2290 Industrial Street
Burlington, Ontario
L7P 1A1



888.842.5668



905.335.5523



info@rpmrubberparts.com



convenient for small
equipment with fractional
horsepower requirements.
Torsional deflection at rated
torque assures excellent
vibration isolation. Specified
torque rating allows 15°
angular deflection for excellent
vibration isolation. Max.
recommended Misalignments-
1/32 in. parallel, 2° angular.
Non-Stock Item, please
contact



[Request for Quote](#)

[Contact Us](#)



USA

4392 Broadway
Depew, NY 14043



Canada

2290 Industrial Street
Burlington, Ontario
L7P 1A1



888.842.5668



905.335.5523



info@rpmrubberparts.com

