


# VMB-3015H8U Sandwich Mounts Unc Thread Type 2



**Item #** VMB-3015H8U Sandwich Mounts Unc Thread Type 2  
**Manufacturer:** RPM Mechanical Inc

## Specifications

A (in)	1.18
B (in)	0.31
C (in)	0.59
Compression Spring Rate Kc (Imperial)	71
Compression Spring Rate Kc (Metric)	406
Compression Static Load (lbs)	112
Compression Static Load (Metric)	500
D (in)	0.75
Durometer	43
Elastomer	Natural Rubber
Grade per SAE J429	1
Manufacturer	RPM Mechanical Inc.
Shear Spring Rate Ks (lbs/in)	8.7

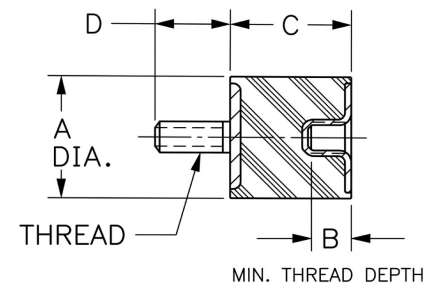

[Request for Quote](#)

[Contact Us](#)

**USA**  
 4392 Broadway  
 Depew, NY 14043

**Canada**  
 2290 Industrial Street  
 Burlington, Ontario  
 L7P 1A1

888.842.5668  
 905.335.5523  
[info@rpmrubberparts.com](mailto:info@rpmrubberparts.com)




# VMB-3015H8U Sandwich Mounts Unc Thread Type 2



**Item #** VMB-3015H8U Sandwich Mounts Unc Thread Type 2  
**Manufacturer:** RPM Mechanical Inc

## Specifications (Continued)

Shear Spring Rate Ks (Metric)	49
Shear Static Load (lbs)	37
Shear Static Load (Metric)	167
Thread Size	5/16-18 UNC
Thread Type	Standard UNC
Types	2

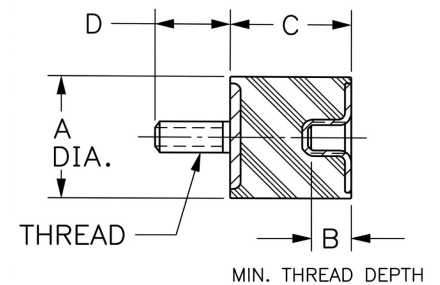

[Request for Quote](#)

[Contact Us](#)

**USA**  
 4392 Broadway  
 Depew, NY 14043

**Canada**  
 2290 Industrial Street  
 Burlington, Ontario  
 L7P 1A1

☎ 888.842.5668  
 ☎ 905.335.5523  
 ✉ info@rpmrubberparts.com

