


# VMB-4030LU Sandwich Mounts Unc Thread Type 2



**Item #** VMB-4030LU Sandwich Mounts Unc Thread Type 2  
**Manufacturer:** RPM Mechanical Inc

## Specifications

A (in)	1.57
B (in)	0.38
C (in)	1.18
Compression Spring Rate Kc (Imperial)	78
Compression Spring Rate Kc (Metric)	442
Compression Static Load (lbs)	2448
Compression Static Load (Metric)	1558
D (in)	0.87
Durometer	68
Elastomer	Natural Rubber
Grade per SAE J429	1
Manufacturer	RPM Mechanical Inc.
Shear Spring Rate Ks (lbs/in)	16

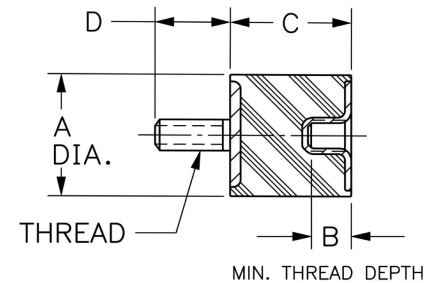

[Request for Quote](#)

[Contact Us](#)

**USA**  
 4392 Broadway  
 Depew, NY 14043

**Canada**  
 2290 Industrial Street  
 Burlington, Ontario  
 L7P 1A1

888.842.5668  
 905.335.5523  
[info@rpmrubberparts.com](mailto:info@rpmrubberparts.com)




# VMB-4030LU Sandwich Mounts Unc Thread Type 2



**Item #** VMB-4030LU Sandwich Mounts Unc Thread Type 2  
**Manufacturer:** RPM Mechanical Inc

## Specifications (Continued)

Shear Spring Rate Ks (Metric)	92
Shear Static Load (lbs)	117
Shear Static Load (Metric)	687
Thread Size	5/16-18 UNC
Thread Type	Standard UNC
Types	2

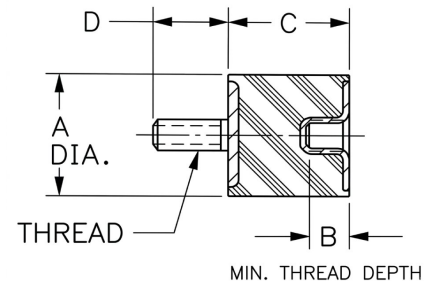

[Request for Quote](#)

[Contact Us](#)

**USA**  
 4392 Broadway  
 Depew, NY 14043

**Canada**  
 2290 Industrial Street  
 Burlington, Ontario  
 L7P 1A1

☎ 888.842.5668  
 ☎ 905.335.5523  
 ✉ info@rpmrubberparts.com

