



INDUSTRIAL
RUBBER
PARTS

CANADA
2290 Industrial Street
Burlington, Ontario L7P 1A1

USA
4392 Broadway
Depew, NY 14043, USA



888.842.5668

905.335.5523

rpmrubberparts.com

100PL-2

in Plateform Mounts (Square)

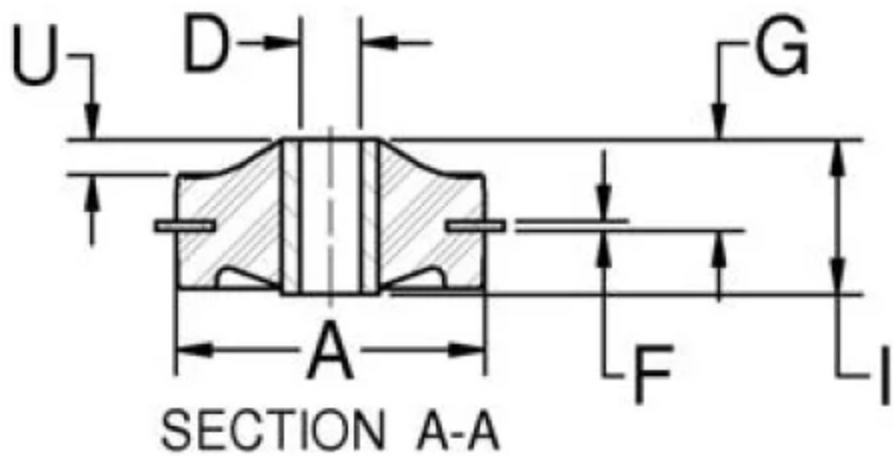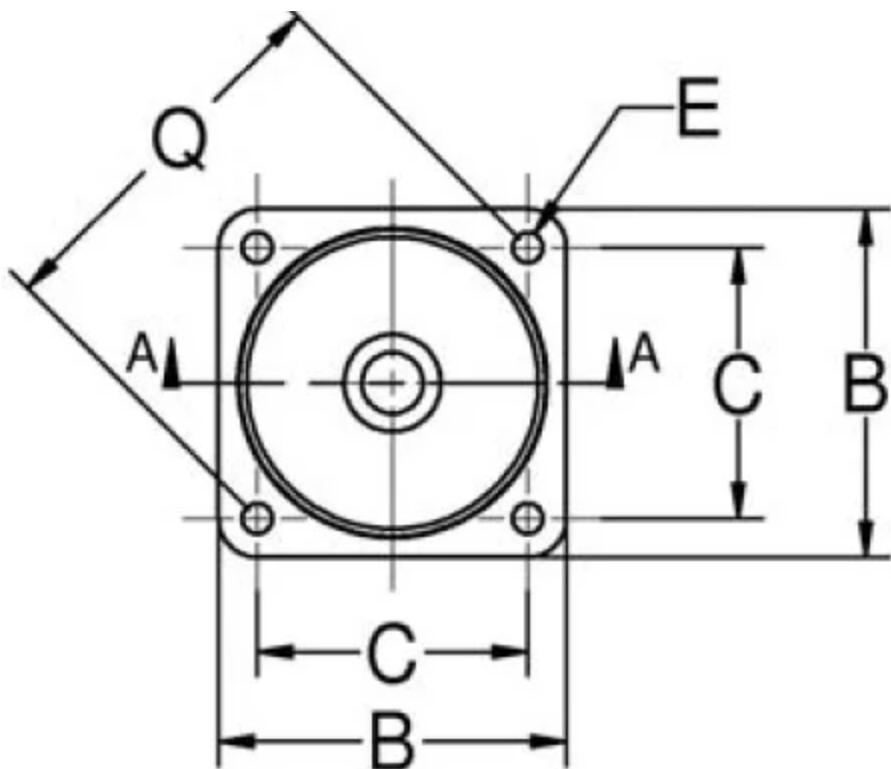

These versatile mounts are available in three types, each type featuring square, diamond or holder configurations to suit a variety of design requirements. The three types, Plateform Mounts, Heavy-Duty Plateform Mounts and Multiplane Mounts, offer a range in load ratings from 0.5 to 600 pounds.

Snubbing washers provide an interlocking system of metal parts which act to prevent damage from overload or excessive shock impact.

Lord Plateform Mounts are easy to install and provide space efficiency. Typical applications include electronic equipment, business machines, medical equipment and small pumps, engines and gen sets.

- Three types of mounts for different applications.
- Square, diamond or holder configurations to suit a variety of design needs.
- Load ratings from 0.5 to 600 pounds per mount.
- Uniform stress distribution.
- Easy to install.

Specifications

A (IN)	1
B (IN)	1.25
C (IN)	1
D (IN)	0.166
E (IN)	0.141
F (IN)	0.032
F (MM)	0.8
L (IN)	
L (MM)	
MATERIAL	Aluminum
INSIDE DIAMETER (IN)	0.17
MAX. AXIAL RATED LOAD @ 1/16 IN (1.58 MM) DEFLECTION (LBS)	2

AXIAL STATIC SPRING RATE (LBS/IN)	32
AXIAL STATIC SPRING RATE (N/MM)	5.6
G (IN)	0.3
G (MM)	7.6
I (IN)	0.41
I (MM)	10.4
O (IN)	0.78
O (MM)	19.8
Q (IN)	1.414
Q (MM)	35.9
MAX AXIAL LOAD RATING (LBS)	2
MAX AXIAL LOAD RATING (N)	9
THICKNESS (IN)	0.03
THICKNESS (MM)	0.8
K (IN)	1.69
K (MM)	42.9
PRODUCT TYPE	Mounts
MANUFACTURER	Lord Corporation
SERIES	100
ENCLOSURE SHAPE	Square
M (IN)	0.141
M (MM)	3.6
P (IN)	0.025

R (MM)	15.7
S (IN)	1.66
S (MM)	42.2
U (IN)	0.15
U (MM)	3.8
APPLICABLE STEEL WASHER	J-2049-1
OUTSIDE DIAMETER (IN)	0.88
OUTSIDE DIAMETER (MM)	22.4