


283PH-185

in Heavy-Duty Plateform Mounts (Holder)

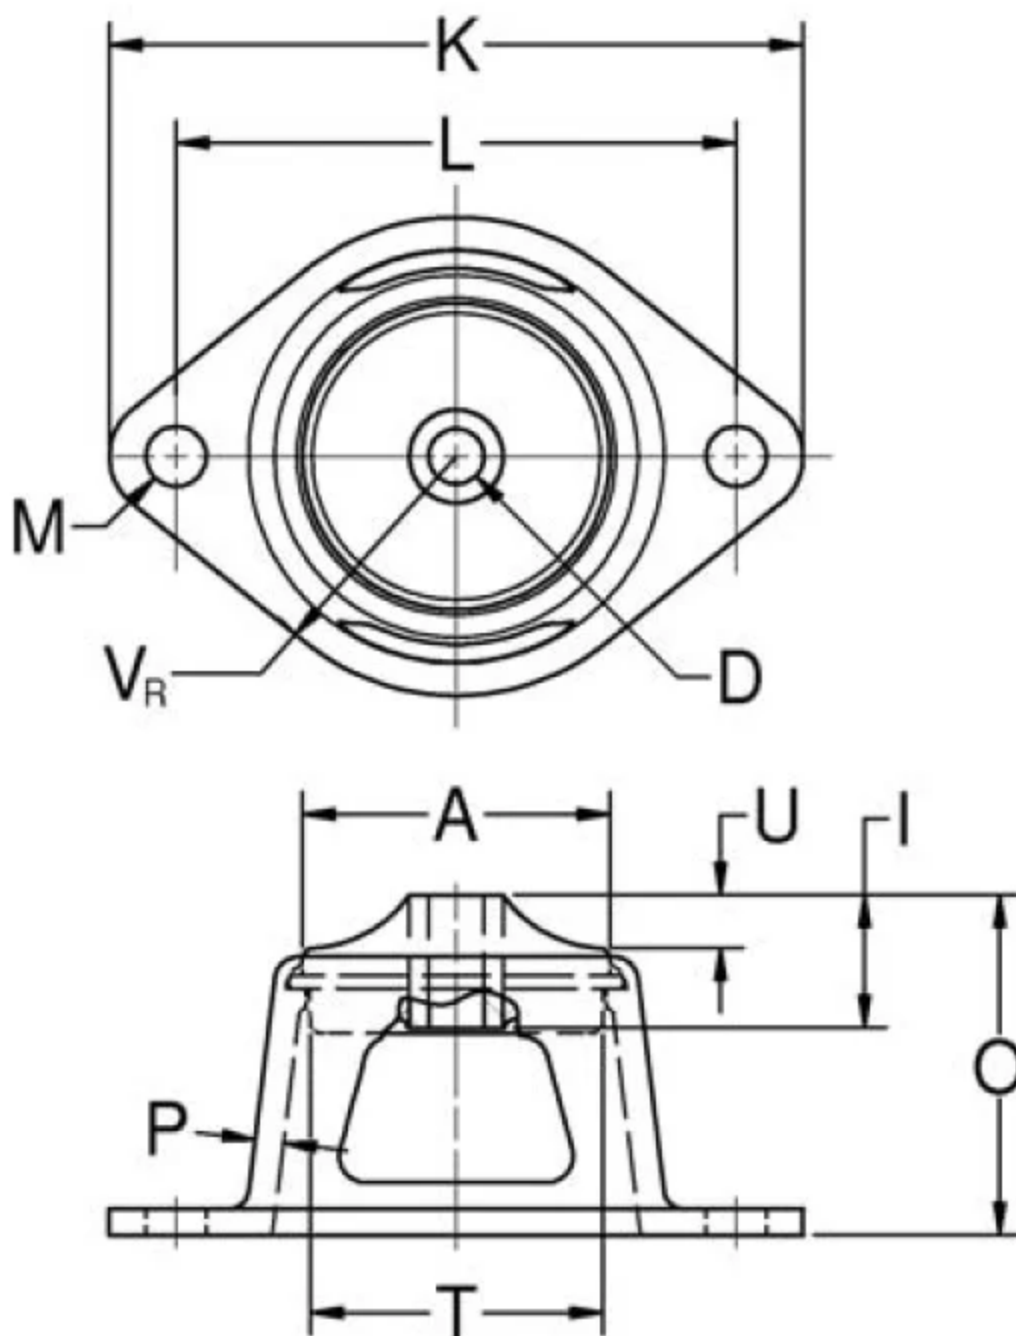

the use of specially compounded elastomers, provides maximum service life. These versatile mounts are available in three types, each type featuring square, diamond or holder configurations to suit a variety of design requirements. The three types, Plateform Mounts, Heavy-Duty Plateform Mounts and Multiplane Mounts, offer a range in load ratings from 0.5 to 600 pounds.

Snubbing washers provide an interlocking system of metal parts which act to prevent damage from overload or excessive shock impact.

Lord Plateform Mounts are easy to install and provide space efficiency. Typical applications include electronic equipment, business machines, medical equipment and small pumps, engines and gen sets.

Non-Stock Item

- Three types of mounts for different applications.
- Square, diamond or holder configurations to suit a variety of design needs.
- Load ratings from 0.5 to 600 pounds per mount.
- Uniform stress distribution.
- Easy to install.

Specifications

A (IN)	2.88
B (IN)	3.25
C (IN)	2.562
D (IN)	0.516
E (IN)	0.328
F (IN)	0.125
F (MM)	3.2
L (IN)	
L (MM)	
MATERIAL	Steel
INSIDE DIAMETER (IN)	

MAX. AXIAL RATED LOAD @ 1/16 IN (1.58 MM) DEFLECTION (N)	823
AXIAL STATIC SPRING RATE (LBS/IN)	740
AXIAL STATIC SPRING RATE (N/MM)	129.6
G (IN)	1.12
G (MM)	28.4
I (IN)	1.5
I (MM)	38.1
O (IN)	3.38
O (MM)	85.9
Q (IN)	0.62
Q (MM)	91.9
MAX AXIAL LOAD RATING (LBS)	185
MAX AXIAL LOAD RATING (N)	823
THICKNESS (IN)	0.125
THICKNESS (MM)	3.2
K (IN)	6.5
K (MM)	165.1
PRODUCT TYPE	Mounts
MANUFACTURER	Lord Corporation
SERIES	283
ENCLOSURE SHAPE	Holder
P (IN)	0.22
P (MM)	5.63

U (MM)	12.7
OUTSIDE DIAMETER (IN)	2.88
OUTSIDE DIAMETER (MM)	73.2
T (IN)	2.75
T (MM)	69.9
RECOMMENDED STEEL WASHER	J-2049-4
VR (IN)	2.25
VR (MM)	57.2