



INDUSTRIAL  
RUBBER  
PARTS


CANADA  
2290 Industrial Street  
Burlington, Ontario L7P 1A1


USA  
4392 Broadway  
Depew, NY 14043, USA

888.842.5668  
905.335.5523  
rpmrubberparts.com

# CBA12-100-50

in Center Bonded Mounts - CBA-50 Series

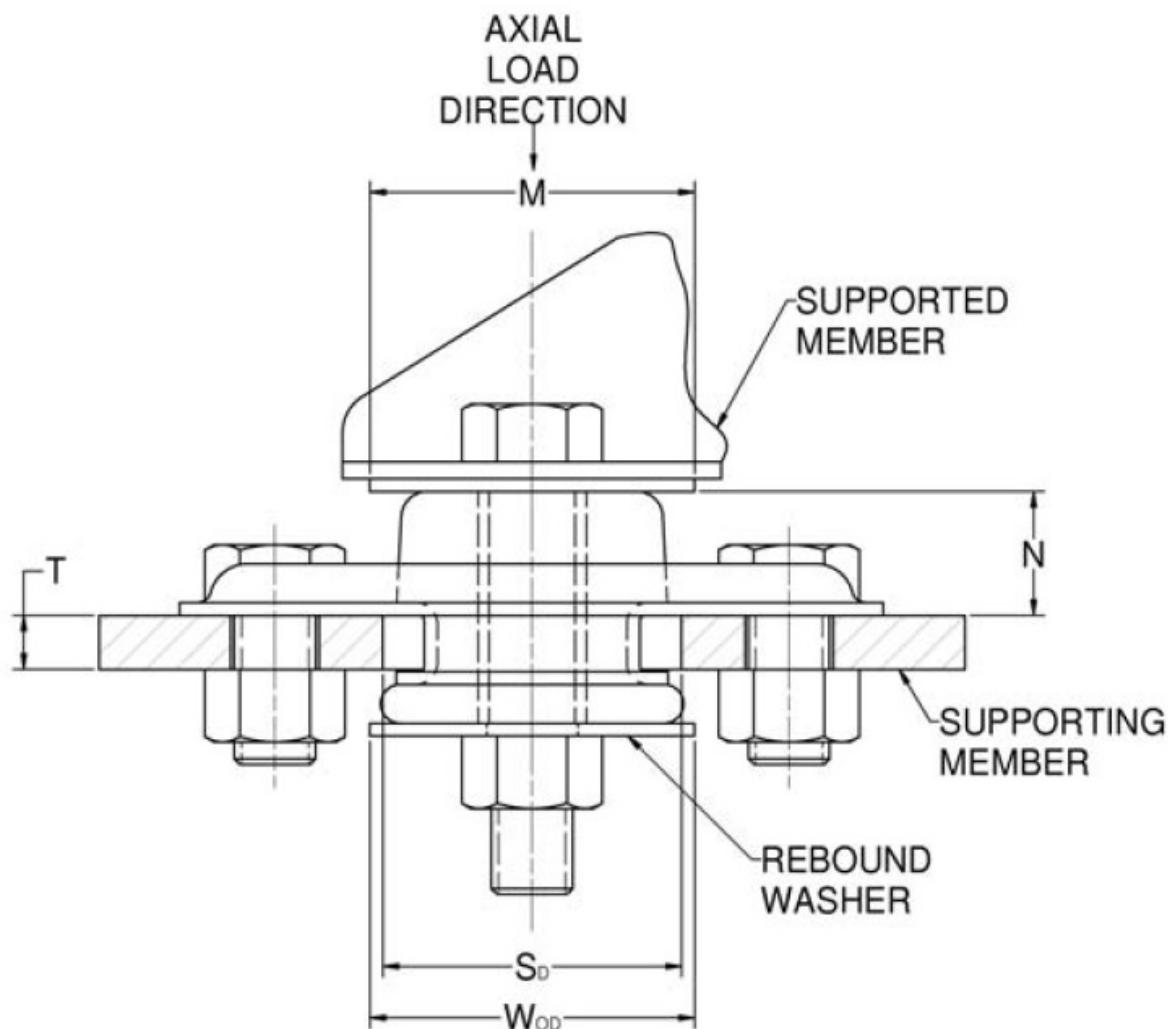

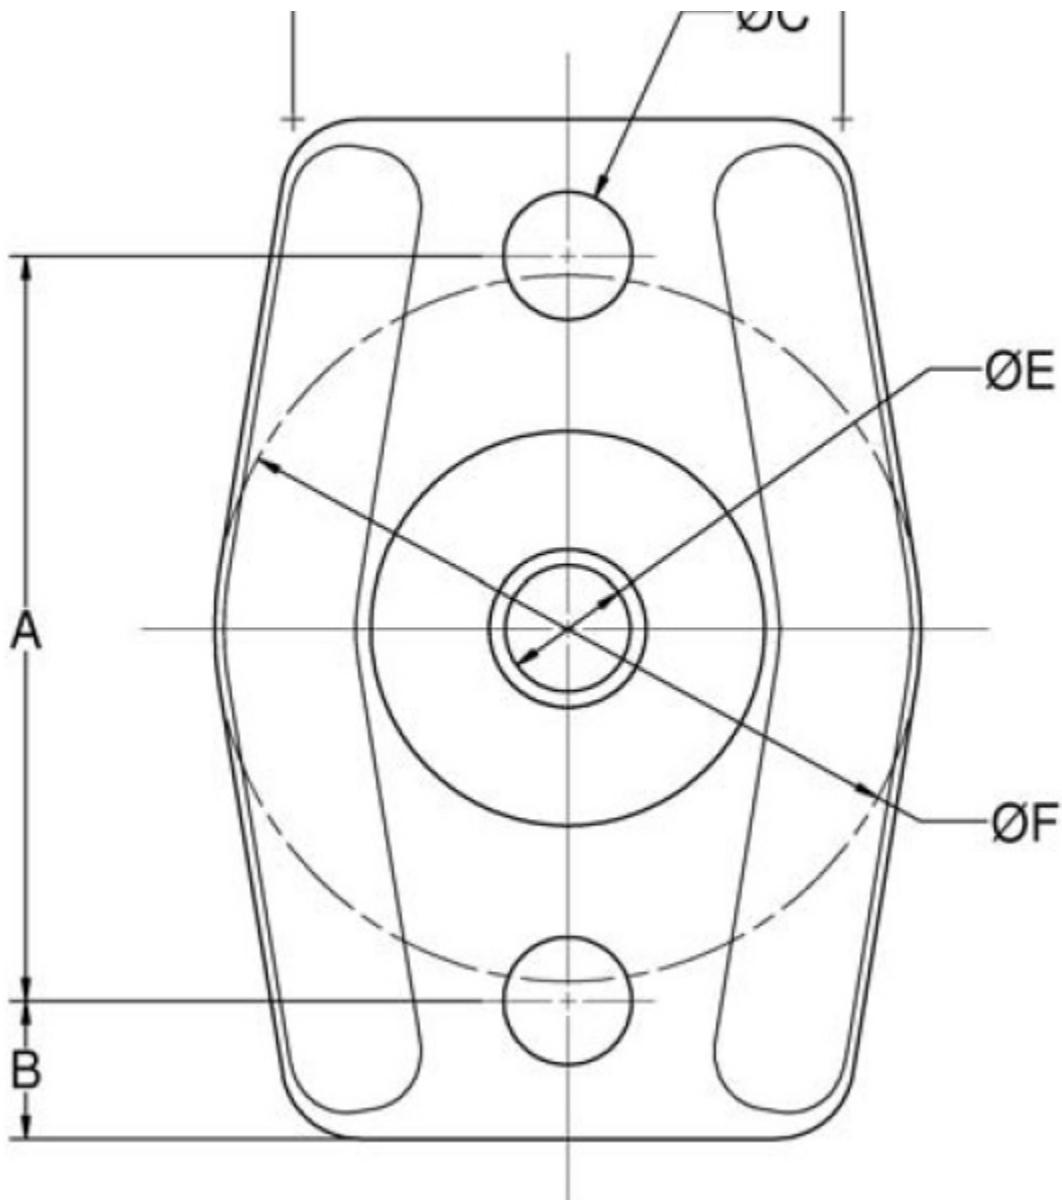

Center Bonded Mounts isolate vibration, control shock and reduce noise due to structure borne vibrations.

Available in a full range of rated load capacities and able to withstand shock loads of 10 g's, these mounts effectively protect equipment and improve operator comfort. They are ideal for automotive, marine, railroad and industrial markets.

Center Bonded Mounts provide flexible suspension systems for mobile, transport-mounted or portable equipment. Typical applications include engines, cabs, fuel tanks, pumps, air conditioning units, compressors and industrial machinery.

Mount & Washer only furnished by Lord.

- Vibration isolation in all directions.
- Noise attenuation.
- Easy installation because of one-piece design.
- Low-cost installation.

- Shock protection in all directions provided by cushioned snubbing, no metal-to-metal bottoming.
- Standard sizes available from stock.
- Space-saving size.
- Captive installation after overload failure when recommended bolt, washer and nut are used.
- Accommodate English and Metric bolts.

Center Bonded Mounts isolate vibration, control shock and reduce noise due to structure borne vibrations.

Available in a full range of rated load capacities and able to withstand shock loads of 10 g's, these mounts effectively protect equipment and improve operator comfort. They are ideal for automotive, marine, railroad and industrial markets.

Center Bonded Mounts provide flexible suspension systems for mobile, transport-mounted or portable equipment. Typical applications include engines, cabs, fuel tanks, pumps, air conditioning units, compressors and industrial machinery.

## Specifications

A (IN)	2.38
B (IN)	0.44
D (IN)	1.75
F (IN)	2.25
F (MM)	57.2
H (IN)	
H (MM)	
MATERIAL	Low Carbon Steel
AXIAL STATIC SPRING RATE (LBS/IN)	1110
AXIAL STATIC SPRING RATE (N/MM)	194
I (IN)	1.25

RADIAL STATIC SPRING RATE (N/MM)	228
THICKNESS (IN)	0.12
THICKNESS (MM)	3
MAX. AXIAL STATIC LOAD RATING AT DEFLECTION (LBS AT IN)	100 at 0.09
MAX. AXIAL STATIC LOAD RATING AT DEFLECTION (N AT MM)	445 at 2.3
MIN. I.D. (E) (IN)	0.397
MIN. I.D. (E) (MM)	10.1
MAX. I.D. (E) (IN)	0.41
MAX. I.D. (E) (MM)	10.4
O.D. (E) (IN)	0.5
O.D. (E) (MM)	12.7
J (IN)	1.07
J (MM)	27.2
K (IN)	1.25
K (MM)	31.8
PRODUCT TYPE	Mounts
MANUFACTURER	Lord Corporation
SERIES	CBA-50
MAX. AXIAL STATIC LOAD AT DEFLECTION (LBS AT IN)	100 at 0.09
MAX. AXIAL STATIC LOAD AT DEFLECTION (N AT MM)	445 at 2.3
SD (IN)	1.38

I.D. (IN)	0.42
I.D. (MM)	10.7
RECOMMENDED STEEL WASHER	J-2049-58
O.D. (IN)	
O.D. (MM)	
APPLICATION ENGINEERING ASSISTANCE	<p>Frequently, vibration isolation problems require a system engineering analysis. Lord has the computer capability, as well as specialized programs, for analyzing engine/transmission combinations. The output from this analysis is a mounting proposal which optimizes performance over the complete range of operating speeds. This service is available to you upon request.</p>
APPLICABLE METAL BRACKET	Y-30266-5-1
MIN. DIAMETER (C) (IN)	0.404
MIN. DIAMETER (C) (MM)	10.3
MAX. DIAMETER (C) (IN)	0.412
MAX. DIAMETER (C) (MM)	10.5
MIN. (M) (IN)	1.5
MIN. (M) (MM)	38.1
N (IN)	0.57
N (MM)	14.5
MIN. (T) (IN)	0.19
MIN. (T) (MM)	4.8
MAX. (T) (IN)	0.25
MAX. (T) (MM)	6.4

