



J-5130-55

in Square Pad Mount

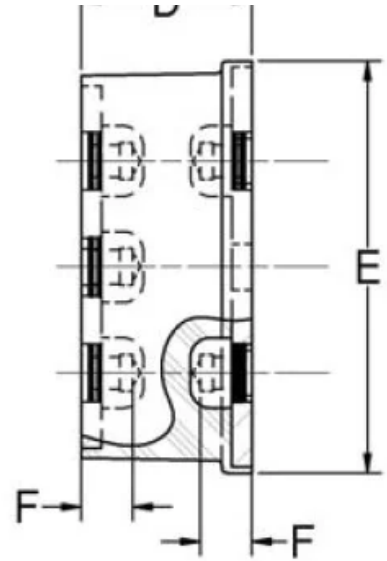

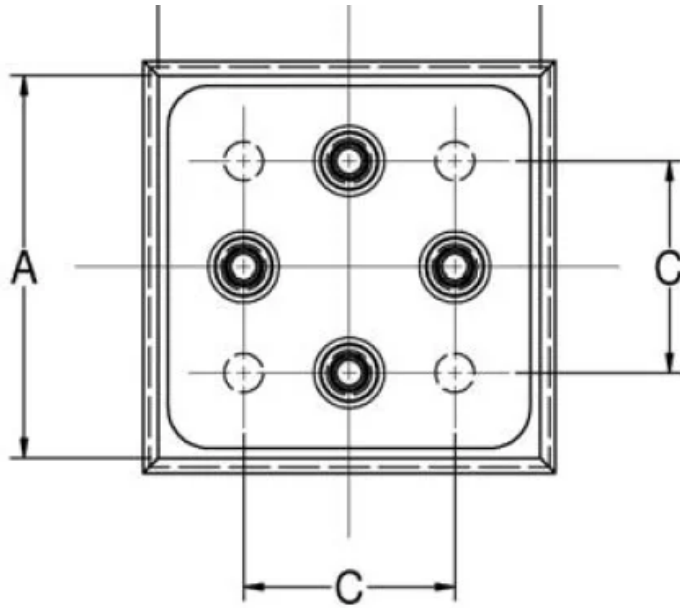

- Economical.
- Compact and lightweight.
- Easy to install.
- Maintenance-free.
- Three size groups: small, medium and large.
- Unitized construction.

Specifications

COMPRESSION STATIC LOAD (LBS)	3400
COMPRESSION STATIC LOAD (N)	15124
COMPRESSION - SPRING RATE KC (LBS/IN)	15000
COMPRESSION - SPRING RATE KC (N/MM)	2627
SHEAR STATIC LOAD (LBS)	450
SHEAR STATIC LOAD (N)	2002
SHEAR - SPRING RATE KS (LBS/IN)	1800
SHEAR - SPRING RATE KS (N/MM)	315

B (IN)	4.75
C (IN)	2.62
D (IN)	2.12
THREAD SIZE	1/2-20 UNC
E (IN)	5.12
F (IN)	0.53
F (MM)	13.5
ELASTOMER	Natural Rubber
G (IN)	
G (MM)	
PRODUCT TYPE	Mounts
MANUFACTURER	Lord Corporation
TYPE	4L
GRADE PER SAE J429	2
FLANGE THICKNESS (IN)	
FLANGE THICKNESS (MM)	