


# VME-1515O6U

in Sandwich Mounts (UNC Thread) Type 5



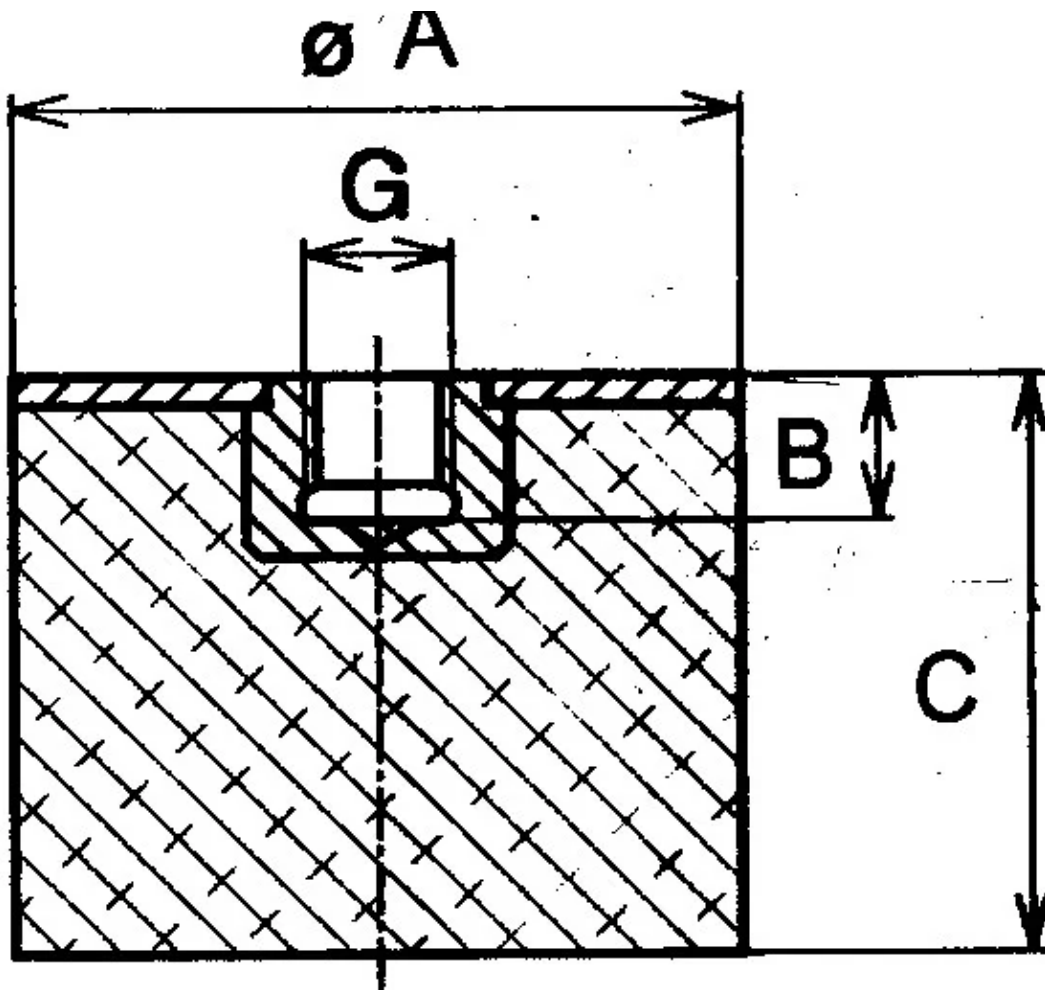

- Economical.
- Compact and lightweight.
- Easy to install.
- Maintenance-free.
- Three size groups: small, medium and large.
- Unitized construction.

RPM Mechanical's sandwich mounts are designed to be a simple and effective way to absorb energy, the resulting effect isolates and protects your equipment from damaging impact forces.

This product type can also be used as machine supports when securing your unit to a base is not required or when the base is not strong enough. Giving you a simple and effective product to isolate your equipment.

Other materials are available on request, contact our sales staff for more information.

|                                       |                    |
|---------------------------------------|--------------------|
| COMPRESSION STATIC LOAD (LBS)         | 17                 |
| COMPRESSION STATIC LOAD (N)           | 77                 |
| COMPRESSION - SPRING RATE KC (LBS/IN) | 64                 |
| COMPRESSION - SPRING RATE KC (N/MM)   | 64                 |
| A (IN)                                | 0.59               |
| B (IN)                                | 0.24               |
| C (IN)                                | 0.59               |
| THREAD SIZE                           | 1/4-20 UNC         |
| DUROMETER                             | 43                 |
| ELASTOMER                             | Natural Rubber     |
| THREAD TYPE                           | Standard UNC       |
| PRODUCT TYPE                          |                    |
| MANUFACTURER                          | RPM Mechanical Inc |
| TYPE                                  | 5                  |
| GRADE PER SAE J429                    |                    |