

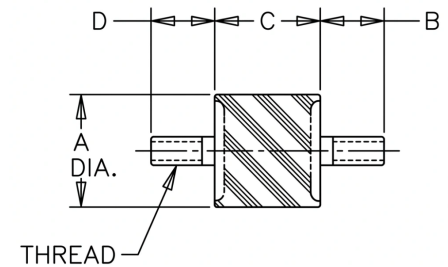
VMA-3030KU Sandwich Mounts Unc Thread Type 1



Item # VMA-3030KU Sandwich Mounts Unc Thread Type 1
Manufacturer: RPM Mechanical Inc

Specifications

| | |
|---------------------------------------|---------------------|
| A (in) | 1.18 |
| B (in) | 0.75 |
| C (in) | 1.18 |
| Compression Spring Rate Kc (Imperial) | 1086 |
| Compression Spring Rate Kc (Metric) | 192 |
| Compression Static Load (lbs) | 168 |
| Compression Static Load (Metric) | 749 |
| D (in) | 0.75 |
| Durometer | 68 |
| Elastomer | Natural Rubber |
| Grade per SAE J429 | 1 |
| Manufacturer | RPM Mechanical Inc. |
| Shear Spring Rate Ks (lbs/in) | 265 |


[Request for Quote](#)
[Contact Us](#)

USA
 4392 Broadway
 Depew, NY 14043

Canada
 2290 Industrial Street
 Burlington, Ontario
 L7P 1A1

888.842.5668

905.335.5523

info@rpmrubberparts.com



VMA-3030KU Sandwich Mounts Unc Thread Type 1



Item # VMA-3030KU Sandwich Mounts Unc Thread Type 1
Manufacturer: RPM Mechanical Inc

Specifications (Continued)

| | |
|-------------------------------|--------------|
| Shear Spring Rate Ks (Metric) | 47 |
| Shear Static Load (lbs) | 56 |
| Shear Static Load (Metric) | 250 |
| Thread Size | 5/16-18 UNC |
| Thread Type | Standard UNC |
| Types | 1 |



[Request for Quote](#)

[Contact Us](#)

USA
4392 Broadway
Depew, NY 14043

Canada
2290 Industrial Street
Burlington, Ontario
L7P 1A1

888.842.5668

905.335.5523

info@rpmrubberparts.com

