Spec Sheets

SK-1947-6 Dynaflex® Shear Type Couplings

Item # SK-1947-6 Dynaflex® Shear Type Couplings
Manufacturer: Parker Lord Corporation

Specifications

Bolt Thread Size	**0.125**
Bore Diameter (A) (in)	**0.125**
Bore Diameter (B) (in)	**0.125**
C (in)	**0.44**
D Ref (in)	**0.56**
E Ref (in)	**0.36**
F (in)	**0.81**
Horse Power (1750 RPM) (hp)	**1/50**
Set Screw Size	**5/40**
Static Torsional Stiffness (lb/in)	**0.053**
Torque Rating (lb-in)	**0.8**
Torque Rating (lb/in)	**0.8**
Typical Applications	**Shear-type flexible couplings are useful in many small equipment driveline applications.Multi-directional misalignment capabilities make them ideally suited for**

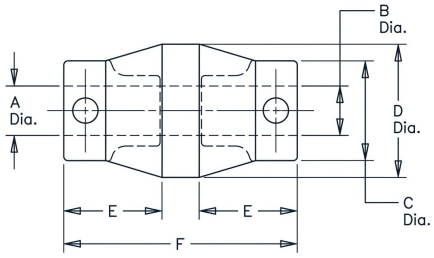

For Low Frequency Vibration Isolation and Misalignment Accommodation Compact, one-piece flexible couplings economically constructed to isolate low- frequency vibration and accommodate multi-directional misalignment.
Large Selection of Standard Sizes Fractional horsepower couplings are available in a

RPM INDUSTRIAL RUBBER PARTS

Request for Quote | Contact Us

USA
4392 Broadway
Depew, NY 14043

Canada
2290 Industrial Street
Burlington, Ontario
L7P 1A1

888.842.5668
905.335.5523
info@rpmrubberparts.com

convenient for small equipment with fractional horsepower requirements. Torsional deflection at rated torque assures excellent vibration isolation. Specified torque rating allows 15° angular deflection for excellent vibration isolation. Max. recommended Misallgnments- 1/32 in. parallet, 2° angular. Non-Stock Item, please contact

USA
4392 Broadway
Depew, NY 14043

Canada
2290 Industrial Street
Burlington, Ontario
L7P 1A1

888.842.5668
905.335.5523
info@rpmrubberparts.com