


# VMA-5030G13U Sandwich Mounts Unc Thread Type 1



**Item #** VMA-5030G13U Sandwich Mounts Unc Thread Type 1  
**Manufacturer:** RPM Mechanical Inc

## Specifications

A (in)	2
B (in)	1.25
C (in)	1.18
Compression Spring Rate Kc (Imperial)	1246
Compression Spring Rate Kc (Metric)	221
Compression Static Load (lbs)	194
Compression Static Load (Metric)	476
D (in)	1.25
Durometer	43
Elastomer	Natural Rubber
Grade per SAE J429	1
Manufacturer	RPM Mechanical Inc.
Shear Spring Rate Ks (lbs/in)	256

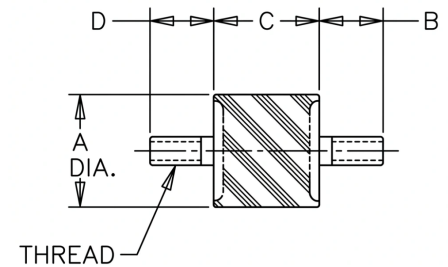
[Request for Quote](#)
[Contact Us](#)

**USA**  
 4392 Broadway  
 Depew, NY 14043

**Canada**  
 2290 Industrial Street  
 Burlington, Ontario  
 L7P 1A1

888.842.5668

905.335.5523

[info@rpmrubberparts.com](mailto:info@rpmrubberparts.com)




# VMA-5030G13U Sandwich Mounts Unc Thread Type 1



Item # VMA-5030G13U Sandwich Mounts Unc Thread Type 1  
Manufacturer: RPM Mechanical Inc

## Specifications (Continued)

Shear Spring Rate Ks (Metric)	43
Shear Static Load (lbs)	65
Shear Static Load (Metric)	288
Thread Size	1/2-13 UNC
Thread Type	Standard UNC
Types	1

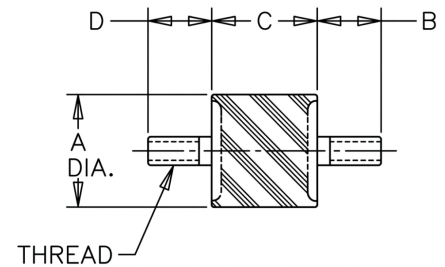

[Request for Quote](#)

[Contact Us](#)

**USA**  
4392 Broadway  
Depew, NY 14043

**Canada**  
2290 Industrial Street  
Burlington, Ontario  
L7P 1A1

888.842.5668

905.335.5523

[info@rpmrubberparts.com](mailto:info@rpmrubberparts.com)

